

luxCONTROL

basicDIM Wireless User Interface

Product Manual



TRIDONIC

Table of Contents


Table of Contents

Short overview	3
Basic functions	4
Smart functions	5
Dimming	5
Preset buttons	5
Colour temperature	5
Indirect / direct ratio	6
Turn off	6
Mounting	7
Technical facts	8

Short overview

1. Short overview

The basicDIM Wireless User Interface brings huge flexibility to interior design as furniture can be replaced or even walls can be rebuilt without having to take wiring of switches or switch placement into account. The switch can be kept wherever the user needs it and it gives direct access to all the important lighting control functionalities.

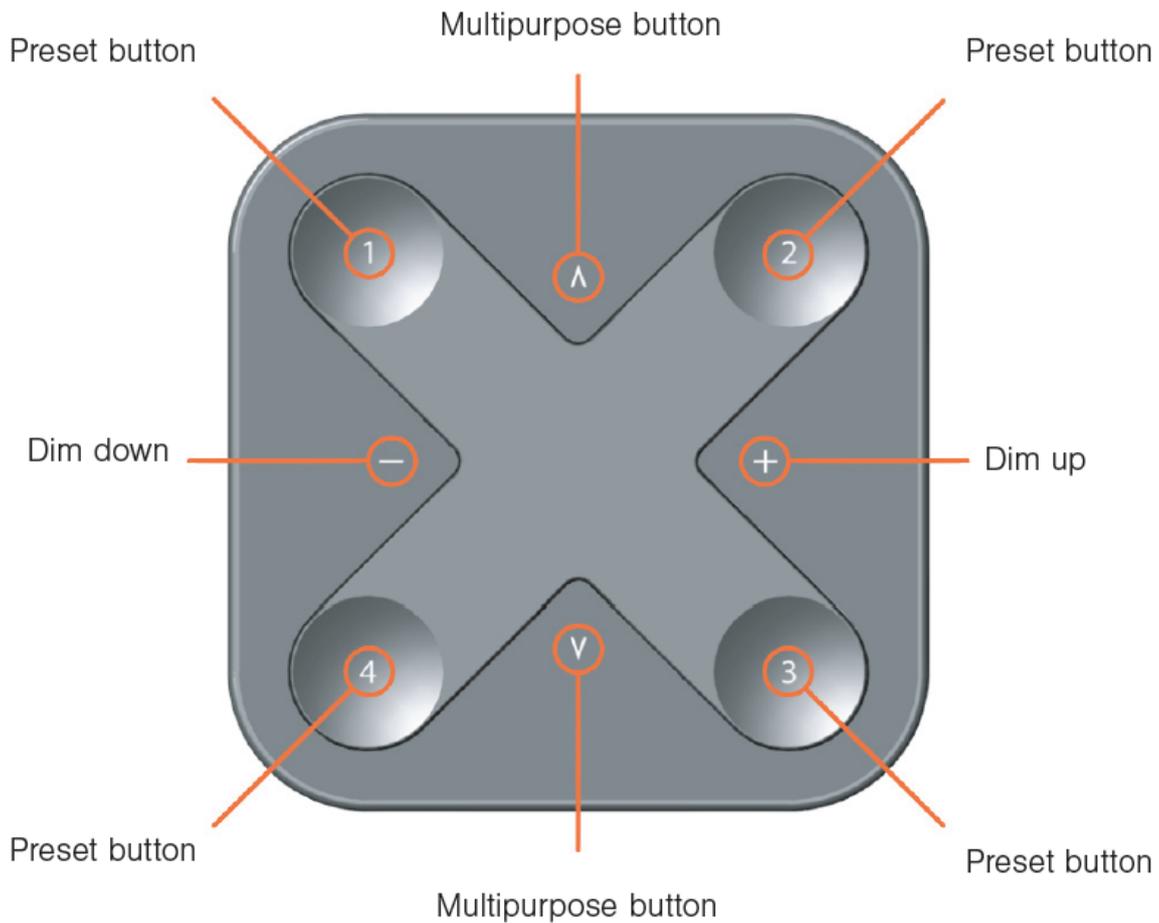

Basic functions

2. Basic functions

The preset buttons of the basicDIM Wireless User Interface can be configured via the Control App. A light indicates the selected preset.

Dim up, Dim down:

- _ Smooth dimming of last chosen preset

Multipurpose buttons:

- _ Change of colour temperature in steps of 25 Kelvin
- _ Change of the indirect/direct ratio

Preset buttons:

- _ Individual luminaire control
- _ Group control
- _ Control of all lamps
- _ Recall scenes
- _ Recall animations

Smart functions

3. Smart functions

3.1. Dimming

Hold the Dim down or Dim up button:

- _ Smooth dimming of last chosen preset, cycle takes 5 seconds

Tap the Dim down button:

- _ Chosen preset goes to 0 %

Tap the Dim up button:

- _ Chosen preset goes to 100 %

3.2. Preset buttons

Tap:

- _ The chosen preset (lamp control, group control, all lamps, scene recall or animation recall) will turn on

Tap again:

- _ The chosen preset (lamp control, group control, all lamps, scene recall or animation recall) will turn off

3.3. Colour temperature

Hold the Multipurpose button:

- _ Changes colour temperature smoothly, cycle takes 5 seconds

Tap the upper Multipurpose button:

- _ Changes to the warmest colour temperature

Tap the lower Multipurpose button:

- _ Changes to the coldest colour temperature

Smart functions

3.4. Indirect / direct ratio

i NOTICE

The sum of indirect / direct is in all cases 100 %.

Hold the upper Multipurpose button:

_ Dims up smoothly the indirect lighting, cycle takes 5 seconds

Hold the lower Multipurpose button:

_ Dims up smoothly the direct lighting, cycle takes 5 seconds

Tap the upper Multipurpose button:

_ The indirect part goes to max level

Tap the lower Multipurpose button:

_ The direct part goes to max level

3.5. Turn off

Press the Dim down or Dim up button for 2.5 seconds


_ Turns all lights off in selected network

The basicDIM Wireless User Interface is equipped with magnets for easy attachment to a mounting bracket. The mounting bracket is included.

Mounting

4. Mounting

The basicDIM Wireless User Interface is equipped with magnets for easy attachment to a mounting bracket. The mounting bracket is included.

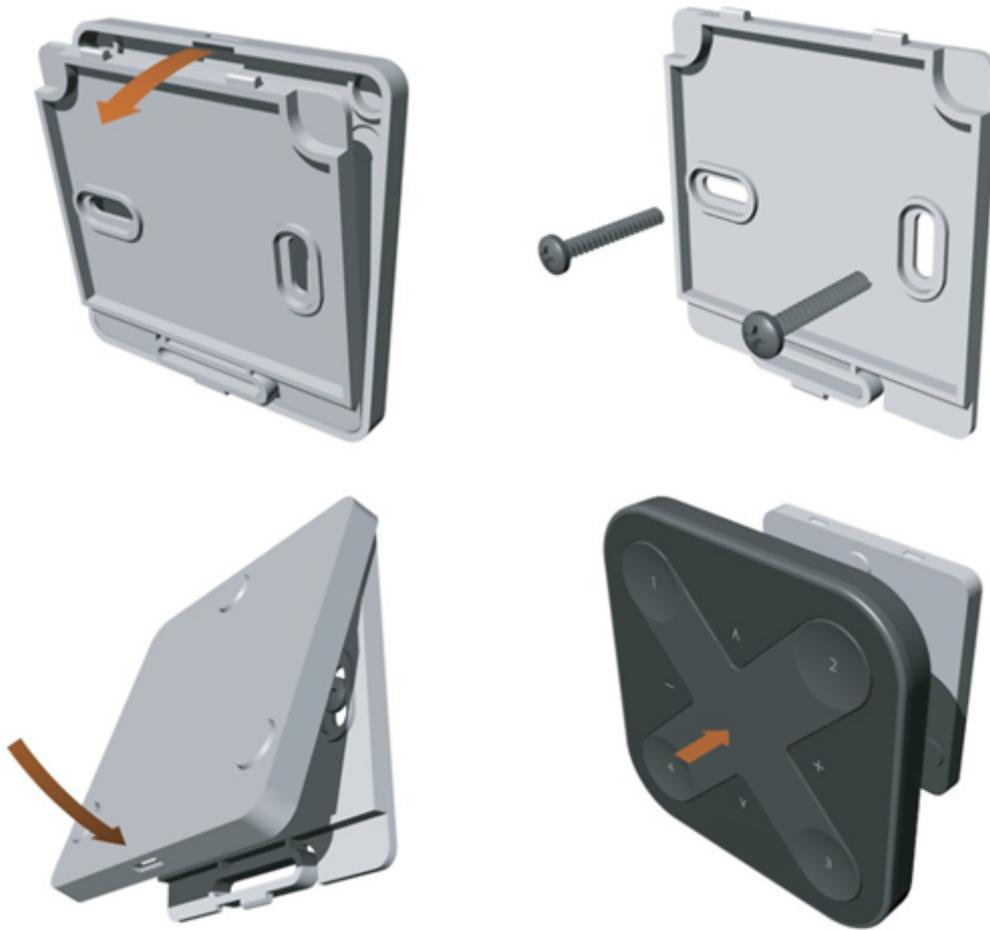

Technical Facts

5. Technical facts

Size

_ 90 x 90 x 12 mm

Colours

_ White and black

Range

_ Up to 60 meters in open air

Battery

_ CR 2430 Lithium-ion

Battery lifetime

_ 2-5 years, depending on usage